

# HDMI to Composite/S-video converter

## User Manual

### IMPORTANT SAFETY INSTRUCTIONS

Prior to your using this device, please read all the instructions carefully and pay high attention to the following safety precautions:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- Do not plug and unplug the device in a power-on state.
- Power supply is DC5V, if use other power supply, please kindly check the detail specification before working.
- Do not allow device and power supply become wet and never touch them when your hands are wet.
- To avoid the device from overheating, do not block the slots and openings in the module housing that provide ventilation.

### 1.PACKAGE DETAILS




HDMI to Composite/S-video converter



AV3 cable



S-video cable



Power supply DC5V/2A




User Manual

### 2.SYSTEM REQUIREMENTS

Blu-ray player and other devices with HDMI output  
TV, Projector or other displays with Composite/S-video input

### 3.CONNECTION

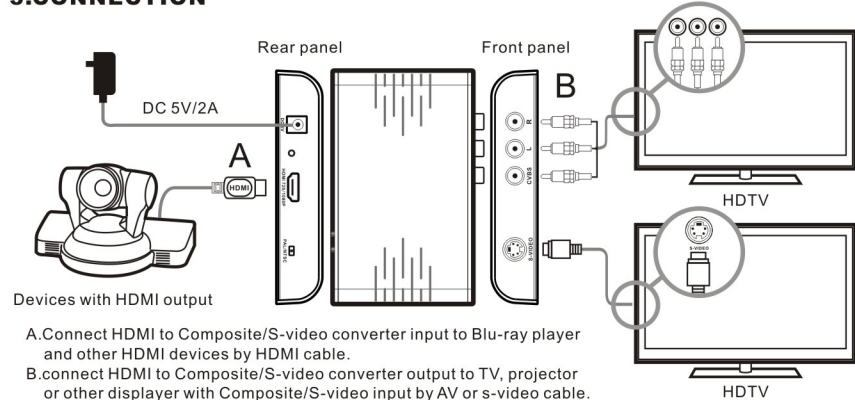

Devices with HDMI output


- Connect HDMI to Composite/S-video converter input to Blu-ray player and other HDMI devices by HDMI cable.
- connect HDMI to Composite/S-video converter output to TV, projector or other displayer with Composite/S-video input by AV or s-video cable.
- Then power on and choose correct displayer channel for video input.

### 4.OPERATION

- Composite video and S-video can be output simultaneously.
- PAL/NTSC can be chosen by PAL/NTSC switch

#### Remark:

- PAL television system is used in China Mainland, Hongkong, Singapore, Australia, New Zealand, Germany, UK and some other countries of Western Europe.
- NTSC television system is used in China Taiwan, Japan, Korea, Philippines, USA, Canada and some other countries of the western hemisphere.

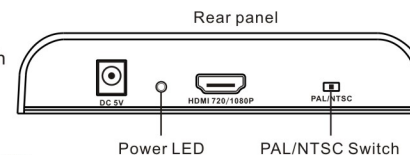

### 5.TROUBLE SHOOTING

- Q: No video output.  
A: Please kindly check and make sure all the devices are well connected, power LED lights up and correct TV channel is chosen.
- Q: Output image is abnormal.  
A: Please kindly check and make sure displayer and this converter output television system are totally matched. If input HDMI signal is from graphics card, please kindly make sure HDMI resolution supported by this converter.

### 6.SPECIFICATION

|   |  |
|---|--|
| Input                                   | HDMI x 1   |
| Output                                  | Composite x 1, S-video x 1   |
| HDMI resolution supported               | 480i@60Hz, 480p@60Hz, 576i@50Hz, 576p@50Hz, 720p@50/60Hz, 1080i@50/60Hz, 1080p@50/60Hz |
| Graphics card HDMI resolution supported | 800x600@60Hz, 1024x768@60Hz, 1280x720@60Hz, 1920x1080@60Hz                             |
| DDC signal                              | 5Vp-p(TTL)   |
| TMDS signal                             | 0.5-1.0Vp-p  |
| Composite output signal                 | 1.0Vp-p, Impedance: 75Ω  |
| S-video output signal                   | Y: 1.0Vp-p, Impedance: 75Ω C: 0.6Vp-p, Impedance: 75Ω                                  |
| Audio output signal                     | L/R Stereo Audio Range: 0.7Vp-p Load: 3kΩ  |
| Power consumption                       | 2.5~5W   |
| Power supply                            | DC5V/2A  |
| Dimensions                              | 128x89x56mm  |

#### Disclaimer

The product name and brand name may be registered trademark of related manufacturers. TM and ® may be omitted on the user manual. The pictures on the user manual are just for reference, and there may be some slight difference with the real products.

We reserve the rights to make changes without further notice to a product or system described herein to improve reliability, function or design.